


Intralox Series 1100
30 Teeth

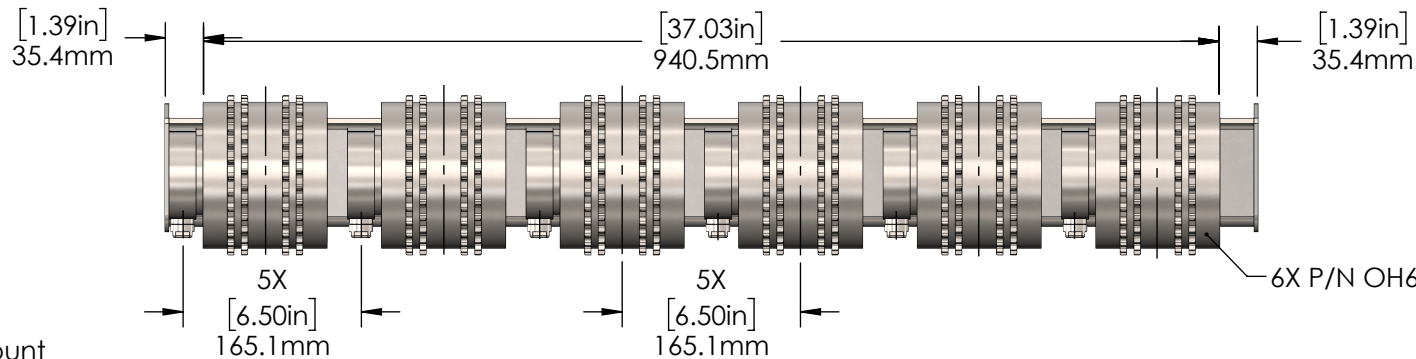

6X P/N OH69-14-135-115-11469

Mounting Distances
Custom / Special Mount

Electrical

6X Flying Lead, Straight, Ø9mm[0.35in], 10m[32.81ft]
24N/28P, G3.0.8.65


Face

6X Cut Shell, Intralox Series 1100, 30 Teeth, Ø 147.5mm P.D.

IP Rating
IP69k

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN mm			
TOLERANCES:	DRAWN	PV	08/02/24
0-6: ±0.1			
>6-30: ±0.2	CHECKED	CD	08/02/24
>30-120: ±0.3			
>120-400: ±0.4			
>400-1000: ±0.5	ENG APPR.		
MATERIAL	PROPRIETARY AND CONFIDENTIAL		
SS 316	THE INFORMATION CONTAINED IN THIS		
	DRAWING IS THE SOLE PROPERTY OF		
FINISH	ONE MOTION. ANY REPRODUCTION IN		
N/A	PART OR AS A WHOLE WITHOUT THE		
	WRITTEN PERMISSION OF ONE MOTION IS		
DO NOT SCALE DRAWING	PROHIBITED.		

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ONE MOTION. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF ONE MOTION IS
PROHIBITED.

PART NO.		OA69-06-14-135-115-13994	
TITLE:			
Assembly of six (6) OH69-14-135-115-11469, IP69k, 14Nm (10.3 lb-ft), Single Core: 50mm (1.97"), 24N/28P, G3.0.8.65, 135mm (5.3"), 115mm (4.5"), Intralox 1100 Cut Shell, Flying Lead-Straight-10m-9mm, Custom Mount, Special Mount			
SIZE			REV
A			01
SCALE: 1:7	Weight(kg): 72.64	SHEET 1 OF 1	